CD Series

The perfect easy-to-carry and easy-to-store pressure washer option for around the home or on the jobsite.

ELECTRIC/GASOLINE - DIRECT DRIVE | PORTABLE - HAND CARRY

CD-1502-2MUH

CD-2003-0MHH

Electric Models

Pump: Direct drive triplex piston General pump with ceramic plungers • Thermal relief valve • Safety relief valve • In-line water strainer • Adjustable low pressure detergent injection

Motor: Totally enclosed fan-cooled electric motor with thermal overload protection

Frame: Powder coated steel mounting plate with center balanced lift and four (4) rubber isolators

Accessories: Variable high/low pressure nozzle with adjustable spray pattern (15-degree high/low pressure nozzle on 2MUH models) • 25-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch two-piece insulated wand

Gasoline Model

Pump: Direct drive triplex piston General pump with ceramic plungers • Thermal relief valve • Safety relief valve • In-line water strainer • Adjustable low pressure detergent injection

Engine: Performance-proven Honda OHV engine with low-oil protection

Frame: Powder coated steel mounting plate with center balanced lift and four (4) rubber isolators

Accessories: Quick connect nozzles (0°, 15°, 25° and detergent nozzle) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch two-piece insulated wand

Stainless-steel and brass unloader with adjustable pressure valve and forged brass manifold

35-foot, 15-amp power cord (20-amp plug on CD-1502 models) with ground fault circuit interrupter (GFCI) (Electric models only)

Pump accepts incoming water up to 180°F (2MUH models only)

Model No.	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CD-1002-0MUH	1000	2.0	1.5/120V, 1Ø, 12.5A	NEMA 5-15P	20in.x11.5in.x14in.	70 lbs.	58 lbs.
CD-1002-2MUH*	1000	2.0	1.5/120V, 1Ø, 12.5A	NEMA 5-15P	20in.x11.5in.x14in.	71 lbs.	66 lbs.
CD-1502-0MUH	1500	2.0	2.0/120V, 1Ø, 17.0A	NEMA 5-20P	20in.x11.5in.x14in.	76 lbs.	70 lbs.
CD-1502-2MUH*	1500	2.0	2.0/120V, 1Ø, 17.0A	NEMA 5-20P	20in.x11.5in.x14in.	76 lbs.	70 lbs.

**Pump accepts incoming water up to 180°F.*

NEMA 5-15P, 15-amp plug

NEMA 5-20P, 20-amp plug

Model No.	PSI	GPM	Displacement*/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CD-2003-0MHH	2000	2.7	196cc Honda OHV	18in.x14.5in.x18in.	75 lbs.	56 lbs.

**As rated by engine manufacturer.*

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

18-0370, 18-0371	Rotating nozzle
50-0161	High pressure detergent injection
CX-0030	50-foot high pressure hose

1 YEAR LIMITED PARTS & LABOR WARRANTY

1 YEAR LIMITED ELECTRIC MOTOR WARRANTY

CSA CERTIFIED *Electric Models*

2 YEAR LIMITED HONDA ENGINE WARRANTY

7 YEAR LIMITED PUMP WARRANTY

Certified to UL-1776 *Gasoline Model*

The CA Series aluminum pressure washer is the ultimate answer for those applications requiring a lightweight, yet durable unit that is also extremely easy to handle.

CA Series

PORTABLE | GASOLINE - DIRECT DRIVE - ALUMINUM

CA-4004-0MRB

Pump: Direct drive triplex piston AR or Mi-T-M pump with ceramic plungers • Stainless-steel and brass unloader • Adjustable pressure • Forged brass manifold • Thermal relief valve • In-line water strainer
Engine: Performance-proven engine with low-oil protection
Frame: Light, corrosion resistant aluminum frame • Convenient nozzle holder for quick connect nozzles • Pneumatic tires with tubes for longer life • Dual rubber isolators
Accessories: Quick connect nozzles (0°, 15° and 25°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip (48-inch lance on 3500- & 4000-PSI models)

1-inch aluminum tube handles for easier pulling

3/16-inch aluminum base plate and solid full-length axle

Patent pending vibration isolation plate with four (4) rubber isolators for reduced movement

Model No.	PSI	GPM	Displacement*/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.	
CA-2403-0MHB	2400	2.4	196cc Honda OHV	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.	
CA-2403-0MRB	2400	2.4	211cc Subaru OHC	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.	
CA-2703-0MHB	2700	2.4	196cc Honda OHV	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.	
CA-2703-0MRB	2700	2.4	211cc Subaru OHC	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.	
CA-2703-8MHB	2700	2.4	196cc Honda OHV	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.	
CA-2703-8MRB	2700	2.4	211cc Subaru OHC	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.	
CA-3003-0MHB	3000	3.0	270cc Honda OHV	42.5in.x23.5in.x24.5in.	155 lbs.	105 lbs.	
CA-3003-0MRB	3000	3.0	265cc Subaru OHC	42.5in.x23.5in.x24.5in.	155 lbs.	105 lbs.	
CA-3504-0MHB	3500	3.5	389cc Honda OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.	
CA-3504-0MRB	3500	3.5	404cc Subaru OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.	NEW!
CA-4004-0MHB	4000	3.5	389cc Honda OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.	
CA-4004-0MRB	4000	3.5	404cc Subaru OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.	NEW!

*As rated by engine manufacturer.

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
AW-8400-0021	Low pressure detergent injection
CX-0005	Insulated dual lance
TX-1002-W	Puncture-proof tires

1 YEAR LIMITED PARTS & LABOR WARRANTY
2 YEAR LIMITED HONDA ENGINE WARRANTY
2 YEAR LIMITED Mi-T-M PUMP WARRANTY
3 YEAR LIMITED SUBARU ENGINE WARRANTY
7 YEAR LIMITED AR PUMP WARRANTY
Certified to UL-1776

JP Series

Optimal balance and maneuverability represent just a few of the great benefits the JP Series offers with its extended handle design. The Mi-T-M quality and durability you've come to expect also shines through with its 1-inch mild steel construction.

GASOLINE - DIRECT DRIVE | PORTABLE

2 NEW Models

Pump: Direct drive triplex piston AR or Mi-T-M pump with ceramic plungers • Stainless-steel and brass unloader • Adjustable pressure • Forged brass manifold • Thermal relief valve • In-line water strainer
Engine: Performance-proven engine with low-oil protection
Frame: Solid steel axle (threaded on 3000- to 4000-PSI models) • Pneumatic tires with tubes for longer life • Dual rubber isolators
Accessories: Quick connect nozzles (0°, 15° and 25°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip (48-inch lance on 3500- & 4000-PSI models)

JP-2703-0MHB

1-inch powder coated steel tube handle for easier pulling

3/16-inch powder coated and welded steel base plate

Convenient gun/ wand holder and hose wrap

Model No.	PSI	GPM	Displacement*/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.
JP-2403-0MHB	2400	2.4	196cc Honda OHV	37in.x21in.x24.5in.	100 lbs.	75 lbs.
JP-2403-0MRB	2400	2.4	211cc Subaru OHC	37in.x21in.x24.5in.	100 lbs.	75 lbs.
JP-2703-0MHB	2700	2.4	196cc Honda OHV	37in.x21in.x24.5in.	110 lbs.	85 lbs.
JP-2703-0MRB	2700	2.4	211cc Subaru OHC	37in.x21in.x24.5in.	110 lbs.	85 lbs.
JP-2703-8MHB	2700	2.4	196cc Honda OHV	37in.x21in.x24.5in.	110 lbs.	85 lbs.
JP-2703-8MRB	2700	2.4	211cc Subaru OHC	37in.x21in.x24.5in.	110 lbs.	85 lbs.
JP-3003-0MHB	3000	3.0	270cc Honda OHV	40in.x22.5in.x24.5in.	180 lbs.	130 lbs.
JP-3003-0MRB	3000	3.0	265cc Subaru OHC	40in.x22.5in.x24.5in.	180 lbs.	130 lbs.
JP-3004-0MHB	3000	3.5	389cc Honda OHV	40in.x22.5in.x24.5in.	186 lbs.	136 lbs.
JP-3504-0MHB	3500	3.5	389cc Honda OHV	40in.x22.5in.x24.5in.	192 lbs.	142 lbs.
JP-3504-0MRB	3500	3.5	404cc Subaru OHV	40in.x22.5in.x24.5in.	192 lbs.	142 lbs.
JP-4004-1MHB	4000	3.5	389cc Honda OHV	40in.x22.5in.x24.5in.	192 lbs.	142 lbs.
JP-4004-1MRB	4000	3.5	404cc Subaru OHV	40in.x22.5in.x24.5in.	192 lbs.	142 lbs.

NEW!

As rated by engine manufacturer.

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
AW-8400-0021	Low pressure detergent injection
CX-0005	Insulated dual lance
TX-1002-W	Puncture-proof tires

NEW! 1 YEAR LIMITED PARTS & LABOR WARRANTY
2 YEAR LIMITED HONDA ENGINE WARRANTY
2 YEAR LIMITED MI-T-M PUMP WARRANTY
3 YEAR LIMITED SUBARU ENGINE WARRANTY
7 YEAR LIMITED AR PUMP WARRANTY
Certified to UL-1776

The powerful electric, direct-drive JP Series is the perfect selection for indoor applications, providing a quiet, exhaust-free operation.

JP Series

PORTABLE | ELECTRIC - DIRECT DRIVE

JP-2003-1ME1

Pump: Direct drive triplex piston General or AR pump with ceramic plungers • Stainless-steel and brass unloader • Adjustable pressure • Forged brass manifold • Thermal relief valve • Safety relief valve • In-line water strainer • Adjustable low pressure detergent injection
Motor: Totally enclosed fan-cooled electric motor • 35-foot power cord (ground fault circuit interrupter, GFCI, on 1.5- to 6.0-HP single-phase models) • NEMA 5-20P, 20-amp plug (1500-PSI models)
Frame: Solid steel axle (threaded on 2000- to 3000-PSI models) • Pneumatic tires with tubes for longer life • Dual rubber isolators
Accessories: Variable high/low pressure nozzle (1000- to 2000-PSI models) • Quick connect nozzles (0°, 15° and 25°) (2500- & 3000-PSI models) • 25-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip

Cold Water Pressure Washers

1-inch powder coated steel tube handles for easier pulling

3/16-inch powder coated and welded steel base plate

Convenient gun/ wand holder and hose wrap

Model No.	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
JP-1002-0ME1*^#	1000	2.0	1.5/120V, 1Ø, 15.0A	NEMA 5-15P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1002-2ME1*^#+	1000	2.0	1.5/120V, 1Ø, 15.0A	NEMA 5-15P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1502-0ME1*^#	1500	2.0	2.0/120V, 1Ø, 20.0A	NEMA 5-20P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1502-2ME1*^#+	1500	2.0	2.0/120V, 1Ø, 20.0A	NEMA 5-20P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-2003-1ME1*^#	2000	2.8	4.0/230V, 1Ø, 16.0A	NEMA L6-20P	37in.x21in.x24.5in.	162 lbs.	112 lbs.
JP-2503-1ME1*^	2500	3.2	6.0/230V, 1Ø, 24.1A	NEMA L6-30P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-2503-0ME3	2500	3.2	6.0/230V, 3Ø, 15.0A or 6.0/460V, 3Ø, 7.5A	NEMA L15-20P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-3004-1ME1^	3000	3.9	8.0/230V, 1Ø, 34.5A	NEMA 6-50P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-3004-0ME3	3000	3.9	8.0/230V, 3Ø, 20.0A or 8.0/460V, 3Ø, 10.0A	NEMA L15-30P	44in.x26in.x27in.	275 lbs.	225 lbs.

**35-foot cord with ground fault circuit interrupter (GFCI).*
^Single-phase models are CSA certified.
#Models are equipped with General pumps, all other models are equipped with AR pumps.
+Pump accepts incoming water up to 180-degrees.

NEMA 5-15P, 15-amp plug

NEMA 5-20P, 20-amp plug

NEMA L15-20P, 20-amp plug

NEMA L6-20P, 20-amp plug

NEMA L15-30P, 30-amp plug

NEMA L6-30P, 30-amp plug

NEMA 6-50P, 50-amp plug

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
CX-0005	Insulated dual lance
CX-0030	50-foot high pressure hose
CX-0066, CX-0067	460V on 6.0- & 8.0-HP, 3-phase models
TX-1002-W	Puncture-proof tires
TX-1302-W	Puncture-proof tires

1 YEAR LIMITED PARTS & LABOR WARRANTY
1 YEAR LIMITED ELECTRIC MOTOR WARRANTY
7 YEAR LIMITED PUMP WARRANTY

Certified in USA & Canada: JP-1002, JP-1502 Single Phase Models

Certified in USA Only: JP-2003, JP-2503, JP-3004 Single Phase Models

CBA Series

A spin-off of Mi-T-M's traditional mild steel belt-drive series, this aluminum model is an excellent choice for customers looking for a lightweight, yet industrial-quality pressure washer.

GASOLINE - BELT DRIVE - ALUMINUM | PORTABLE

2 NEW Models

Patent pending design

CBA-3504-0MHB

Pump: Belt drive triplex piston AR pump with ceramic plungers • Stainless-steel and brass unloader • Adjustable pressure • Forged brass manifold • Thermal relief valve • Water filter with clear sleeve for screen inspection
Engine: Performance-proven engine with low-oil protection
Frame: Light, corrosion resistant aluminum frame • Two-piece belt guard for quick access to belts • Pneumatic tires with tubes for longer life • Dual rubber isolators
Component: Dual cogged belt drive system for increased belt life
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip (48-inch lance on 3500- & 4000-PSI models)

1-inch aluminum tube handles for easier pulling

3/16-inch aluminum base plate and solid 7/8-inch diameter full-length threaded axle

Patent pending vibration isolation plate with four (4) rubber isolators for reduced movement

Model No.	PSI	GPM	Displacement*/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.	
CBA-3003-0MHB	3000	3.0	270cc Honda OHV	47in.x27.5in.x27.5in.	187 lbs.	137 lbs.	
CBA-3003-0MRB	3000	3.0	265cc Subaru OHC	47in.x27.5in.x27.5in.	187 lbs.	137 lbs.	
CBA-3004-0MHB	3000	3.5	389cc Honda OHV	47in.x27.5in.x27.5in.	215 lbs.	165 lbs.	
CBA-3504-0MHB	3500	3.7	389cc Honda OHV	47in.x27.5in.x28.5in.	215 lbs.	165 lbs.	
CBA-3504-0MRB	3500	3.7	404cc Subaru OHV	47in.x27.5in.x28.5in.	215 lbs.	165 lbs.	NEW!
CBA-4004-0MHB	4000	3.4	389cc Honda OHV	47in.x27.5in.x28.5in.	215 lbs.	165 lbs.	
CBA-4004-0MRB	4000	3.4	404cc Subaru OHV	47in.x27.5in.x28.5in.	215 lbs.	165 lbs.	NEW!

**As rated by engine manufacturer.*

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
AW-8400-0021	Low pressure detergent injection
CX-0005	Insulated dual lance
TX-1302-W	Puncture-proof tires

1 YEAR LIMITED PARTS & LABOR WARRANTY
2 YEAR LIMITED HONDA ENGINE WARRANTY
Certified to UL-1776
3 YEAR LIMITED SUBARU ENGINE WARRANTY
7 YEAR LIMITED PUMP WARRANTY

The JCW Series offers a more compact, economical answer to your needs in the belt-drive pressure washer category. To complete the package, all JCW models feature a quality AR pump with a limited 7-year warranty.

JCW Series

PORTABLE | GASOLINE - BELT DRIVE

JCW-2703-0MRB

Pump: Belt drive triplex piston AR pump with ceramic plungers • Stainless-steel and brass unloader • Adjustable pressure • Forged brass manifold (Nickel plated brass on 4000-PSI model) • Thermal relief valve • Water filter with clear sleeve for screen inspection
Engine: Performance-proven engine with low-oil protection
Frame: 3/16-inch powder coated steel base plate with welded reinforcement for reduced vibration • Convenient hose wrap • Gun/wand holder for convenient storage • Solid steel threaded axle • Pneumatic tires with tubes for longer life • Dual rubber isolators
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip (48-inch lance on 3500- & 4000-PSI models)

JCW-3504-0MHB

1 1/4-inch powder coated steel tube handles (1-inch on 2400- to 2700-PSI models)

Two-piece belt guard with 1/4-turn release for quick access to belts

Dual cogged belt drive system for increased belt life

Model No.	PSI	GPM	Displacement*/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.	
JCW-2403-0MHB	2400	2.8	196cc Honda OHV	37.5in.x22in.x25in.	171 lbs.	121 lbs.	
JCW-2403-0MRB	2400	2.8	211cc Subaru OHC	37.5in.x22in.x25in.	171 lbs.	121 lbs.	
JCW-2703-0MHB	2700	2.4	196cc Honda OHV	37.5in.x22in.x25in.	171 lbs.	121 lbs.	
JCW-2703-0MRB	2700	2.4	211cc Subaru OHC	37.5in.x22in.x25in.	171 lbs.	121 lbs.	
JCW-3003-0MHB	3000	3.0	270cc Honda OHV	39.5in.x28.5in.x26in.	232 lbs.	178 lbs.	
JCW-3003-0MRB	3000	3.0	265cc Subaru OHC	39.5in.x28.5in.x26in.	232 lbs.	178 lbs.	
JCW-3004-0MHB	3000	3.5	389cc Honda OHV	39.5in.x28.5in.x26in.	243 lbs.	189 lbs.	
JCW-3504-0MHB	3500	3.7	389cc Honda OHV	39.5in.x28.5in.x26in.	245 lbs.	191 lbs.	
JCW-3504-0MRB	3500	3.7	404cc Subaru OHV	39.5in.x28.5in.x26in.	245 lbs.	191 lbs.	NEW!
JCW-4004-1MHB	4000	3.4	389cc Honda OHV	39.5in.x28.5in.x26in.	249 lbs.	195 lbs.	
JCW-4004-1MRB	4000	3.4	404cc Subaru OHV	39.5in.x28.5in.x26in.	249 lbs.	195 lbs.	NEW!

**As rated by engine manufacturer.*

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
AW-8400-0021	Low pressure detergent injection
CX-0005	Insulated dual lance
TX-1002-W	Puncture-proof tires
TX-1302-W	Puncture-proof tires

1 YEAR LIMITED PARTS & LABOR WARRANTY
2 YEAR LIMITED HONDA ENGINE WARRANTY
Certified to UL-1776
3 YEAR LIMITED SUBARU ENGINE WARRANTY
7 YEAR LIMITED PUMP WARRANTY

CW Premium Series

The workhorse CW Premium Series is specially designed with premier 1/4-inch steel base plates- unlike any other unit on the market!

GASOLINE - BELT DRIVE | PORTABLE

CW-4004-3MV0

Pump: Belt drive triplex piston General pump with ceramic plungers • Stainless-steel and brass unloader mounted on base plate • Forged brass manifold (Nickel plated brass on CW-4004-3MV0) • Thermal relief valve • Water filter with clear sleeve for screen inspection
Engine: Performance-proven engine with low-oil protection
Frame: 1/4-inch powder coated steel base plate • Two-piece belt guard with 1/4-turn release for quick access to belts • Convenient hose wrap • Dual rubber isolators
Component: Heavy-duty dual cogged belt drive system for increased belt life
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip (48-inch lance on 3500- & 4000-PSI models)

CW-3504-4MGR

1 1/4-inch powder coated steel tube handles with gun/wand holder for convenient storage

External bypass system allows more water into the system to protect from heat build-up

Pneumatic mag tires with tubes for longer life and solid steel threaded axle

Model No.	PSI	GPM	Displacement*/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.	
CW-2505-4MGH	2500	4.4	389cc Honda OHV	45.5in.x28in.x26in.	290 lbs.	216 lbs.	
CW-3004-4MGH	3000	3.5	389cc Honda OHV	45.5in.x28in.x26in.	290 lbs.	216 lbs.	
CW-3504-4MGH	3500	3.7	389cc Honda OHV	46in.x28in.x30in.	290 lbs.	216 lbs.	
CW-3504-4MGR	3500	3.7	404cc Subaru OHV	46in.x28in.x30in.	290 lbs.	216 lbs.	
CW-4004-4MGH	4000	3.5	389cc Honda OHV	46in.x28in.x30in.	290 lbs.	216 lbs.	NEW!
CW-4004-4MGR	4000	3.5	404cc Subaru OHV	46in.x28in.x30in.	290 lbs.	216 lbs.	NEW!
CW-4004-3MV0^	4000	4.0	480cc Vanguard OHV	46in.x28in.x30in.	330 lbs.	256 lbs.	

*As rated by engine manufacturer.
^Electric start (battery included).

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
AW-8400-0021	Low pressure detergent injection
CX-0005	Insulated dual lance
CX-0045	Electric start (battery included)
CX-0054, CX-0055	Roll cage
TX-1302-M	Puncture-proof tires

2 YEAR LIMITED PARTS & LABOR WARRANTY
2 YEAR LIMITED HONDA ENGINE WARRANTY
2 YEAR LIMITED VANGUARD ENGINE WARRANTY
3 YEAR LIMITED SUBARU ENGINE WARRANTY
10 YEAR LIMITED PUMP WARRANTY
Certified to UL-1776

Great for indoors! This powerful, electric belt drive series is the perfect solution for any industrial job requiring exhaust-free operation.

CW Series

PORTABLE | ELECTRIC - BELT DRIVE

CW-2405-4ME1

Pump: Belt drive triplex piston General pump with ceramic plungers • Stainless-steel and brass unloader • Forged brass manifold • Thermal relief valve
Motor: Totally enclosed fan-cooled electric motor with thermal overload protection • 10-foot power cord
Frame: Powder coated steel tube handles • 1/4-inch powder coated steel base plate • Hose wrap with gun/wand holder • Solid steel threaded axle • Pneumatic tires with tubes for longer life • Dual rubber isolators
Component: Heavy-duty dual cogged belt drive system and cast-iron pulleys
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip (48-inch lance on 4000- & 5000-PSI models)

External bypass system creates less heat build-up

Water filter with clear sleeve for screen inspection

Totally enclosed powder coated steel belt guard

Model No.	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CW-2405-4ME1	2400	4.6	7.5/230V, 1Ø, 35.7A	NEMA 6-50P	46in.x28in.x30in.	345 lbs.	333 lbs.
CW-2405-4ME3*	2400	4.6	8.0/230V, 3Ø, 24.7A or 8.0/460V, 3Ø, 11.5A	NEMA L15-30P	46in.x28in.x30in.	255 lbs.	243 lbs.
CW-3004-4ME1	3000	3.5	7.5/230V, 1Ø, 35.0A	NEMA 6-50P	46in.x28in.x30in.	350 lbs.	338 lbs.
CW-3004-4ME3*	3000	3.5	8.0/230V, 3Ø, 23.0A or 8.0/460V, 3Ø, 11.5A	NEMA L15-30P	46in.x28in.x30in.	330 lbs.	318 lbs.
CW-3005-0ME1	3000	4.8	10.0/230V, 1Ø, 37.5A	NEMA 6-50P	45.5in.x32.5in.x30in.	470 lbs.	396 lbs.
CW-3005-0ME3*	3000	4.8	10.0/230V, 3Ø, 25.6A or 10.0/460V, 3Ø, 12.8A	NEMA 15-50P	45.5in.x32.5in.x30in.	450 lbs.	376 lbs.
CW-3006-4ME3*	3000	5.7	15.0/230V, 3Ø, 40.0A or 15.0/460V, 3Ø, 20.0A	NEMA 15-50P	45.5in.x32.5in.x30in.	505 lbs.	431 lbs.
CW-4004-0ME3*	4000	3.9	15.0/230V, 3Ø, 40.0A or 15.0/460V, 3Ø, 20.0A	NEMA 15-50P	45.5in.x32.5in.x30in.	505 lbs.	431 lbs.
CW-5004-0ME3*	5000	4.0	15.0/230V, 3Ø, 40.0A or 15.0/460V, 3Ø, 20.0A	NEMA 15-50P	45.5in.x32.5in.x30in.	505 lbs.	431 lbs.

**460V motors available as no-cost options.*

NEMA L15-30P, 30-amp plug



NEMA 15-50P, 50-amp plug

NEMA 6-50P, 50-amp plug

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
AW-8400-0021	Low pressure detergent injection
CX-0003	460V, 3-Phase models
CX-0005	Insulated dual lance
CX-0057	460V, 3-Phase models
CX-0062	460V, 3-Phase models
TX-1302-W	Puncture-proof tires

1 YEAR LIMITED PARTS & LABOR WARRANTY
1 YEAR LIMITED ELECTRIC MOTOR WARRANTY
7 YEAR LIMITED PUMP WARRANTY

CW Series

Designed for wash bays, golf courses and restaurant applications. This stainless-steel pressure washer offers a superior package design combined with a quiet operating system.

ELECTRIC - BELT DRIVE | STATIONARY

CW-2004-SME1 comes standard with low pressure detergent injector

Pump: Belt drive triplex piston General pump with ceramic plungers • Stainless-steel and brass unloader mounted on base plate • Forged brass manifold • Thermal relief valve • In-line water strainer • Quick connect low pressure detergent injection • Bypass system • 175°F hot packing kit
Motor: Open drip-proof motor (1000- & 3000-PSI models) • Totally enclosed fan-cooled electric motor with manual thermal overload protection (2000-PSI models) • 4-foot electrical cord with ground fault circuit interrupter (NEMA 5-20P, 20-amp plug on 1000-PSI model)
Frame: Easy-to-access cabinet design • Rubber isolators
Components: Dual cogged belt drive system • Conveniently located on/off switch • Time delay shutdown will shut unit off automatically when trigger gun is released and timer reaches setting
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • Adjustable pressure insulated dual lance

Pump accepts incoming water up to 175°F

Removable panel for pump access

Stainless-steel base and frame

Model No.	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CW-1003-SME1	1000	2.5	2.0/120V, 1Ø, 18.8A	NEMA 5-20P	29.5in.x20.5in.x15in.	222 lbs.	172 lbs.
CW-2004-SME1	2000	3.9	6.0/230V, 1Ø, 24.1A	NEMA L6-30P	29.5in.x20.5in.x15in.	272 lbs.	214 lbs.
CW-2004-SME3	2000	3.9	6.0/230V, 3Ø, 15.0A	NEMA L15-20P	29.5in.x20.5in.x15in.	262 lbs.	204 lbs.
CW-3004-SME1*	3000	3.5	8.0/230V, 1Ø, 37.0A	NEMA 6-50P	29.5in.x20.5in.x15in.	302 lbs.	244 lbs.
CW-3004-SME3	3000	3.5	8.0/230V, 3Ø, 20.0A	NEMA L15-30P	29.5in.x20.5in.x15in.	292 lbs.	234 lbs.

**CSA certification is pending.*

NEMA 5-20P, 20-amp plug

NEMA L15-20P, 20-amp plug

NEMA L15-30P, 30-amp plug

NEMA L6-30P, 30-amp plug

NEMA 6-50P, 50-amp plug

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

AW-9501-0000	Stainless-steel wall mounting bracket
CX-0069	Auto start/stop
CX-0076, CX-0077	460V, 3-Phase models
CX-0078	Remote box

Optional stainless-steel wall mounting bracket available (AW-9501-0000)

1 YEAR LIMITED PARTS & LABOR WARRANTY
1 YEAR LIMITED ELECTRIC MOTOR WARRANTY
7 YEAR LIMITED PUMP WARRANTY
US CSA CERTIFIED

The CW Series offers a robust and reliable diesel belt drive pressure washer especially designed for shipyards and off-shore applications.

CW Series

PORTABLE/STATIONARY | DIESEL - BELT DRIVE

CW-3004-4MDY

CW-3004-4MDY Features:
Pump: Stainless-steel and brass unloader with fixed pressure • Forged brass manifold • Thermal relief valve • Water filter with clear sleeve for screen inspection
Engine: 0.95-gallon fuel tank capacity
Frame: Powder coated steel tube handles • 1/4-inch powder coated base plate • Totally enclosed powder coated steel belt guard • Hose wrap and gun/wand holder • Solid steel threaded axle • Pneumatic tires with tubes • Rubber isolators
Component: Dual cogged belt drive system with cast iron pulleys
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip

CW-6106-2MDK

CW-6106-2MDK Features:
Pump: Stainless-steel and brass unloader with fixed pressure • Nickel plated manifold • Thermal relief valve
Engine: 12-volt electric starter with alternator and regulator • 9.38-gallon fuel tank capacity
Frame: Powder coated heavy-duty steel channel skid frame • Roll cage and lifting hook • Totally enclosed powder coated steel belt guard • Hose wrap and gun/wand holder
Components: Pressure indicating gauge • Pressure adjustable 1000- to 6100-PSI by engine throttle • Positive drive synchronous belt/sprocket system • Large 20-gallon float tank (unloader bypasses to tank) • Easily accessible control panel
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 1/2-inch wire braided pressure hose • Professional-grade insulated trigger gun with safety lock-off • 48-inch lance with adjustable grip and #5.0 nozzle

Belt drive triplex ceramic General plunger pump

Professional Yanmar diesel engine

Four-cylinder four-cycle water-cooled Kubota diesel engine with electric start (battery included)

Model No.	PSI	GPM	HP/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CW-3004-4MDY	3000	3.5	9.0 Yanmar	46in.x28in.x30in.	321 lbs.	245 lbs.
CW-6106-2MDK*	6100	6.3	37.5 Kubota	55in.x42in.x52.5in.	1535 lbs.	1010 lbs.

**Electric start (battery included).*

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0161	High pressure detergent injection
AW-0018-0374	Rotating nozzle
AW-8400-0021	Low pressure detergent injection
CX-0005	Insulated dual lance
CX-0044	Electric start (battery included)
CX-0056	Roll cage
TX-1302-W	Puncture-proof tires

1 YEAR LIMITED PARTS & LABOR WARRANTY
2 YEAR LIMITED YANMAR ENGINE WARRANTY
3 YEAR LIMITED KUBOTA ENGINE WARRANTY
7 YEAR LIMITED PUMP WARRANTY

Certified to UL-1776
ETL Listed: CW-3004-4MDY

CWC Series

This high-PSI model comes protected in a roll cage design, offering up an abundance of pressure in a compact, user-friendly unit. The 8-hour run time capacity is especially useful for continuous operations typical in many industrial applications.

GASOLINE - BELT DRIVE | PORTABLE

CWC-5004-2MGH

Pump: Belt drive triplex piston General or AR pump with ceramic plungers • Preset stainless-steel and brass unloader • Forged brass manifold • Thermal relief valve • Safety relief valve • Water filter with clear sleeve for screen inspection (High capacity water filter on 3000-PSI model)
Engine: Performance-proven OHV engine with low-oil protection • Electric start (battery included)
Frame: Two-piece belt guard with 1/4-turn release for quick access to belts • Hose wrap with gun/wand holder
Components: Heavy-duty dual cogged belt drive system with cast iron pulleys • Easy start valve (3000-PSI model) • Large canister high mount muffler (3008, 5005 & 6004 models) • Polyethylene tank will not rust
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors (1/2-inch diameter on 3000-PSI model) • Professional-grade insulated trigger gun with safety lock-off • 48-inch lance with rubber grip

Removable fuel tank (11.5-gallon capacity) allows for 8-hour running time and easy cleaning and flushing

Powder coated steel frame with 1 1/4-inch roll cage, handles and lifting hook

Pneumatic mag tires with tubes, locking tire brake and solid steel threaded axles

Model No.	PSI	GPM	Displacement*/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CWC-3008-2MGH^	3000	7.8	670cc Honda OHV	43in.x27.75in.x36in.	511 lbs.	388 lbs.
CWC-5004-1MGH	5000	4.0	614cc Honda OHV	43in.x27.75in.x36in.	501 lbs.	378 lbs.
CWC-5004-2MGH^	5000	4.0	614cc Honda OHV	43in.x27.75in.x36in.	501 lbs.	378 lbs.
CWC-5005-2MGH^	5000	4.5	670cc Honda OHV	43in.x27.75in.x36in.	511 lbs.	388 lbs.
CWC-6004-2MGH^	6000	3.7	670cc Honda OHV	43in.x27.75in.x36in.	511 lbs.	388 lbs.

**As rated by engine manufacturer.*
^Models equipped with General pumps, all other models equipped with AR pumps.

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

AW-0018-0374	Rotating nozzle
AW-3005-0035	Sand injector
TX-1304-M	Puncture-proof tires

1 YEAR LIMITED PARTS & LABOR WARRANTY

2 YEAR LIMITED HONDA ENGINE WARRANTY

7 YEAR LIMITED PUMP ENGINE WARRANTY

Certified to UL-1776

ETL Listed:
CWC-5004-1MGH
CWC-5004-2MGH
CWC-5005-2MGH

Get more power with less pressure! Mi-T-M's cold water, high volume wash is the perfect answer for applications that require cleaning of heavy solids, especially from large industrial equipment. Ideal for wash bay set ups.

CHV Series

STATIONARY | ELECTRIC - BELT DRIVE

CHV-0525-0ME3 shown with remote box option (CX-0075)

Pump: Aluminum manifold
Motor: Totally enclosed fan-cooled electric motor with thermal overload protection • 10-foot, 8/3 power cord on single-phase • 10-foot, 10/4 power cord on three-phase
Frame: 11-gauge powder coated steel base plate • Four (4) rubber isolators
Components: Time delay shutdown • Heavy-duty dual cogged belt drive system and cast iron pulleys
Accessories: Stainless-steel long range nozzle • 50-foot x 3/4-inch non-marking hose with quick connects • High volume gun with adjustable pattern from straight stream to cone mist

Typical Water Treatment Installation

CHV-0525-0ME3 connected to optional 300-gallon tank (CX-0072) which is connected to optional sump pump and in-ground fiberglass pit from our water treatment line.

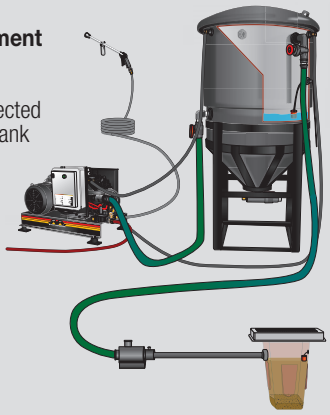

Belt drive diaphragm pump with pulsation dampener

Pressure regulator with manual dump lever and gauge

Makeup water shut-off solenoid & flow switch on outlet for time delay shutdown

Model No.	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CHV-0525-0ME1	500	25.0	10.0/230V, 1Ø, 41.5A	NEMA 6-50P	38in.x23.5in.x24in.	432 lbs.	372 lbs.
CHV-0525-0ME3	500	25.0	10.0/230V, 3Ø, 25.6A	NEMA L15-30P	38in.x23.5in.x24in.	407 lbs.	347 lbs.

NEMA L15-30P, 30-amp plug

NEMA 6-50P, 50-amp plug

Options *(Consult price list or www.mitm.com for more information on option descriptions and qualifying models)*

50-0185	Accessory hose reel
CX-0072	300-gallon tank
CX-0073	460V, 3-Phase models (NEMA L16-20P)
CX-0074	18-inch stand
CX-0075	Remote box

NEMA L16-20P, 20-amp plug

1 YEAR LIMITED PARTS & LABOR WARRANTY

1 YEAR LIMITED ELECTRIC MOTOR WARRANTY

1 YEAR LIMITED PUMP WARRANTY